


Brace Fittings

BRACE FITTINGS – RETROFIT ACCESSORIES

P3860

USE WITH P3820-050, P3825-050, P3840-050 AND P3845-050 ON PAGES 5c.2 & 5c.3

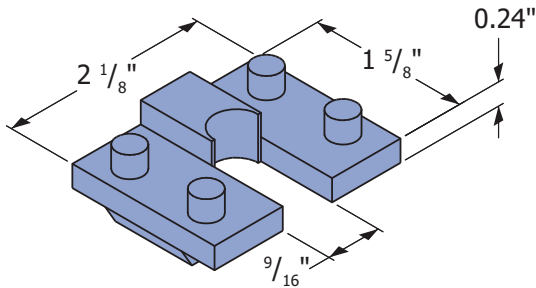



Material / Finish Specifications P3860

Material: P/M Nickel Steel FN-0208-S

Finish: ASTM B633 Type III SC1 (EG)



LS 100

USE WITH SPF 100-XXX ON PAGE 5c.2



LS 200

USE WITH SPF 200-XXX ON PAGE 5c.3

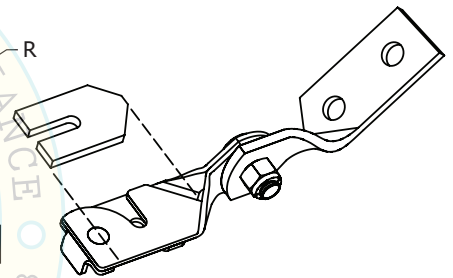

Part No.	Rod Size	Rod Hole Size "R" (Dia.)
LS 100-050	1/2"	9/16"
LS 100-062	5/8"	1 1/16"
LS 100-075	3/4"	1 3/16"

Part No.	Rod Size	Rod Hole Size "R" (Dia.)
LS 200-050	1/2"	9/16"
LS 200-062	5/8"	1 1/16"
LS 200-075	3/4"	1 3/16"

Material / Finish Specifications LS 100 and LS 200

Material: ASTM A1011 SS Grade 33 min.

Finish: ASTM B633 Type III SC1 (EG)

Note:

- Accessories on this page are to be used with Fittings on pages 5c.2 and 5c.3 as noted on those pages. Reference those pages for additional details.

Atkore
Unistrut

16100 S. Lathrop Ave
Harvey, IL 60426
Toll-Free: (800) 882-5543

www.unistrutseismic.com

Structural Engineer: Rami Elhassan
California SE No. 3930

Page:

5c.4